




Rougier Afrique International

Managing forests. Enriching wood.

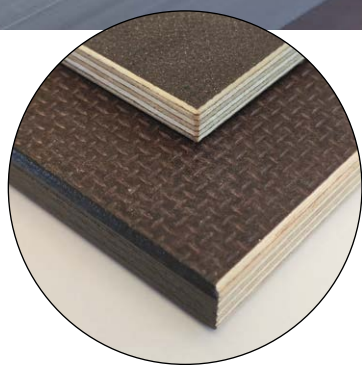

APPLICATIONS:

- Flooring trailers and light vehicles
- Flight cases
- Stables for horses
- Podiums and entresols
- Packaging

OZIGO MESH-PLY

Ozigo MESH-ply is a Birch replacement plywood for antislip and flooring applications
1 side with wire mesh phenolic coating, reverse side with smooth phenolic film coating

GENERAL INFORMATION

Species	100% Ozigo (<i>Dacryodes buettneri</i>)
Coating	Phenolic film dark brown film/mesh 165 gr.
Composition	all layers in 1,5 mm
Edge sealing	Panel edges are sealed with acrylic paint.
Finish	Calibrated and both sides sanded
Glue	Class 3 phenolic EN 314-2 E1/2 EN717-1
Formaldehyde emission	(EN 717-1): < 0.01 mg/m ³ (test conducted on 16 April 2026)
Density	675 kg/m ³ (+/- 10%) according EN 323
Dimensional tolerance	according EN 315
Sustainability certification	FSC® 100% (certificate FSC® C143628, CU-COC- 874178) on demand
Legality	EUTR and EUDR compliant
Marking	CE2+ for structural use ≥ 9 mm according to EN 13986 CE for non-structural use < 9 mm according to EN 13986

Thickness	2500x1250 mm		2500x1500		3000x1500	
	plies	pcs/crate	plies	pcs/crate	plies	pcs/crate
4 mm	3-ply	190	3-ply	158	3-ply	130
6,5 mm	5-ply	116	5-ply	96	5-ply	80
9 mm	7-ply	84	7-ply	70	7-ply	58
12 mm	9-ply	63	9-ply	53	9-ply	43
15 mm	11-ply	50	11-ply	42		35
18 mm	13-ply	42	13-ply	35	13-ply	29
21 mm	15-ply	36	15-ply	30	15-ply	25
24 mm	17-ply	32	17-ply	26	17-ply	22
27 mm	19-ply	28	19-ply	23	19-ply	19



The given information given in this datasheet is non-binding and can be changed without notice