




Rougier Afrique International

Managing forests. Enriching wood.

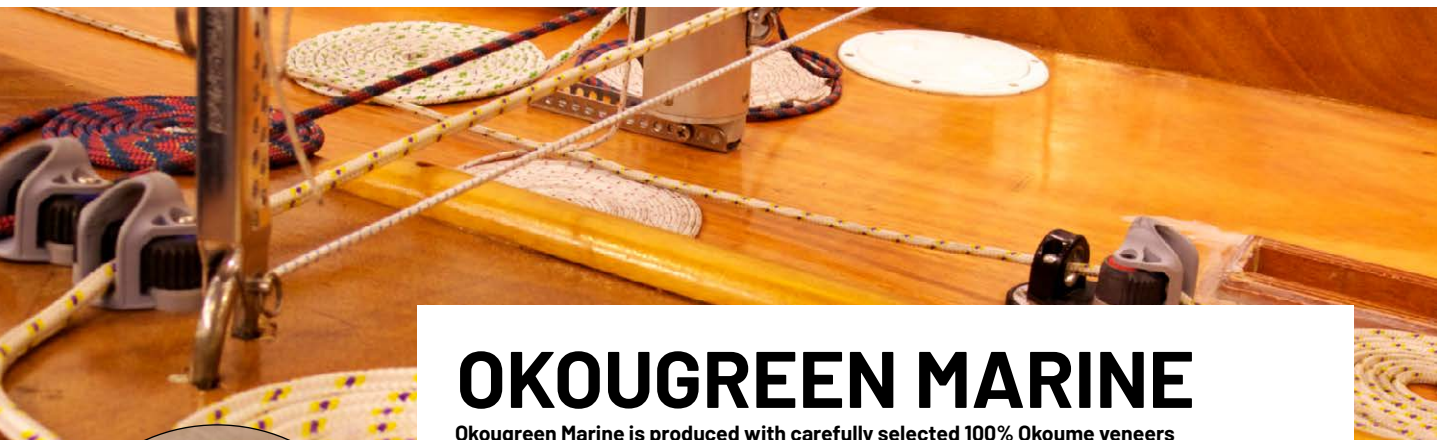

APPLICATIONS:

- Interior fittings of boats
- Bulkheads of yachts
- Outdoor furniture
- Construction in extreme outdoor environment

OKOUGREEN MARINE

Okougreen Marine is produced with carefully selected 100% Okoume veneers for high demanding exterior and marine applications

GENERAL INFORMATION

Species	100% Okoume (Aucoumea klaineana)
Faces	B/BB (II/III) as per EN 635-2
Core	selected 100% natural full sheets
Finish	Calibrated and both sides sanded
Glue	Class 3 phenolic EN 314-2 E1/2 EN717-1
Formaldehyde emission	(EN 717-1): < 0.01 mg/m ³ (test conducted on 16 April 2026)
Density	480-500 kg/m ³ (+/- 10%) according EN 323
Dimensional tolerance	according EN 315
Technical certification	BS-1088: 2018 FCBA CC DQ 69/21)
Sustainability certification	FSC® 100% (certificate FSC® C143628 CU-COC-874178) on demand
Legality	EUTR and EUDR compliant
Marking	CE2+ for structural use ≥ 8 mm according to EN 13986 CE for non-structural use < 8 mm according to EN 13986

	2440x1220 mm		3100x1530 mm		3100x1220 mm	
Thickness	plies	pcs/crate	plies	pcs/crate	plies	pcs/crate
4 mm	3-ply	220	3-ply	135	3-ply	220
5 mm	3-ply	175	3-ply	108	3-ply	175
6 mm	5-ply	150	5-ply	90	5-ply	150
9 mm	5-ply	100	5-ply	60	5-ply	100
12 mm	7-ply	75	7-ply	45	7-ply	75
15 mm	9-ply	60	9-ply	36	9-ply	60
18 mm	11-ply	50	11-ply	30	11-ply	50
25 mm	13-ply	36	13-ply	21	13-ply	36
30 mm	15-ply	30	15-ply			
40 mm	17-ply	23				

The given information in this datasheet is non-binding and can be changed without prior notice

